



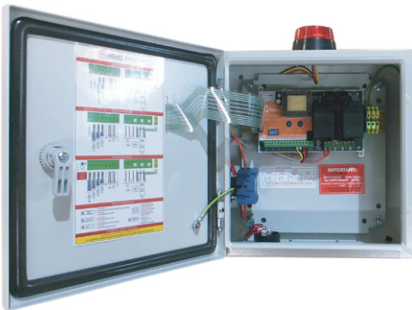

240V Standard Electric Pump Controllers

Features:

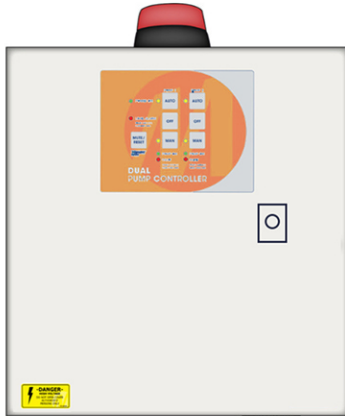

| | |
|---|-----------------------------------|
| Powder coated lockable cabinet | ✓ |
| Weather proof enclosure | ✓ |
| Main isolator | ✓ |
| Auto start anti freeze 6 seconds every 7 days | ✓ |
| Adjustable overload protecton | ✓ |
| 12 Volt control circuit | ✓ |
| Single Volt free contact external connection | ✓ |
| Five digital inputs | ✓ |
| External strobe light | ✓ |
| Buzzer and mute switch | ✓ |
| 2 minute staggered start | ✓ |
| 5 or 15 minute high level time delay | ✓ |
| Alarm for pump failure | ✓ |
| Alarm for high level | ✓ |
| Two,three or four float switches | ✓ |
| Single or dual 240V and 415V | ✓ |
| Alarm for low level (4th float switch option) | ✓ |
| Twelve different operation functions | ✓ |
| Individual pump isolating switch | Yes- but only as external fitting |
| Touch pad on inner door | Yes- but only as external fitting |
| Optional BMS | Yes- but only as external fitting |
| Optional SMS | Yes- but only as external fitting |
| Optional back up battery | Yes- but only as external fitting |

Standard Electrical Accessories



Standard Float Switch