

VORTEX PUMPS FBV SERIES



Clear Industry P/L sole agent in Australia




2
YEAR
WARRANTY

FBV Sewage Vortex Pump features a vortex impeller and wide interior pump casing, effectively pumping and discharging water containing solids and fibrous foreign materials, ideal for sewage wastewater treatment.

- Thermal and over current protector.
- Ductile iron vortex impeller
- Max liquid temperature 40°C
- Standard cable length 10m

Technical Specifications

Name	Specification
Motor housing	Cast iron
Pump casing	Cast iron
Impeller	Cast iron
Motor shaft	Stainless steel
Fixtures	Stainless steel
O-rings	NBR rubber
Mechanical seal	Double
Motor version	IP 68 class F
Voltage	3 phase 415V 2850 RPM

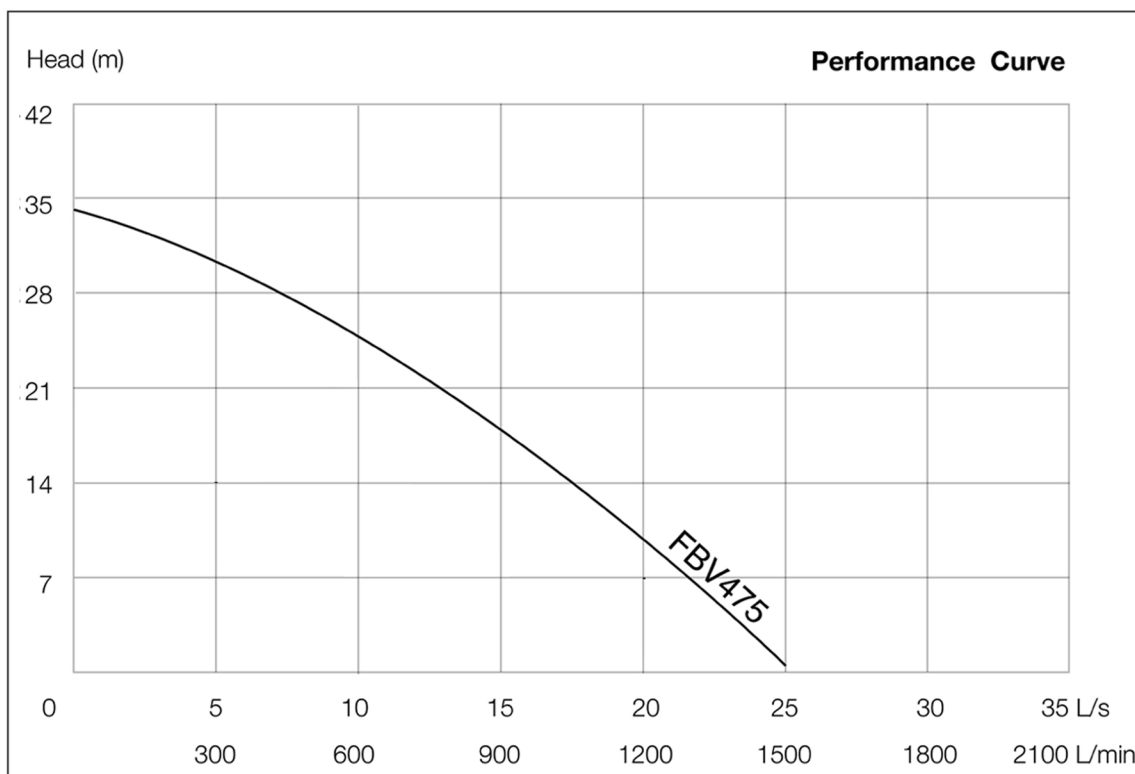

FBV SERIES 7.5 Kw 415V

MODEL NO	Discharge (mm)	Max Flow (L/s)	Max Head (m)	Output (Kw)	Voltage (V)	FLC (A)	RPM	Weight (Kg)	Insulation Class
FBV 475	100	25	34	7.5	415	16.5	2850	64	F

Manual Only

PICTURES ARE FOR ILLUSTRATIVE PURPOSES ONLY
DISCLAIMER: EVERY EFFORT HAS BEEN MADE TO PUBLISH CORRECT DETAILS.
NO RESPONSIBILITY WILL BE TAKEN FOR ERRORS OR CHANGES IN PRODUCT SPECIFICATION.

Clear Industry P/L
1/4 Whitehead Court, Glendenning NSW 2761
T: 02 9675 6381
F: 02 9675 6382
E: clearindustry@optusnet.com.au
W: www.clearartecpumps.com.au