




FS SERIES 0.4Kw

Compact design and high performance, durable for handling abrasive liquids. Suitable for general construction and civil engineering.

- Stainless steel outer casing - cooling for continuous operation.
- Dynamically balanced chrome steel impellers.
- Double mechanical seal in oilbath.
- Thermal overload protection.
- Easy maintenance & servicing.


Technical specifications

Shaft	stainless steel 1.4006
Outer casing	stainless steel 1.4301
Inlet plate	cast iron
Impeller	chrome steel
Cable	10 meter H07RNF
Mechanical seal	double
O-ring and volute	NBR rubber
Fixtures	stainless 1.4301
Motor version	IP 68 Class F
Max. motor temp.	40°C
Voltage	1 phase – 240 V

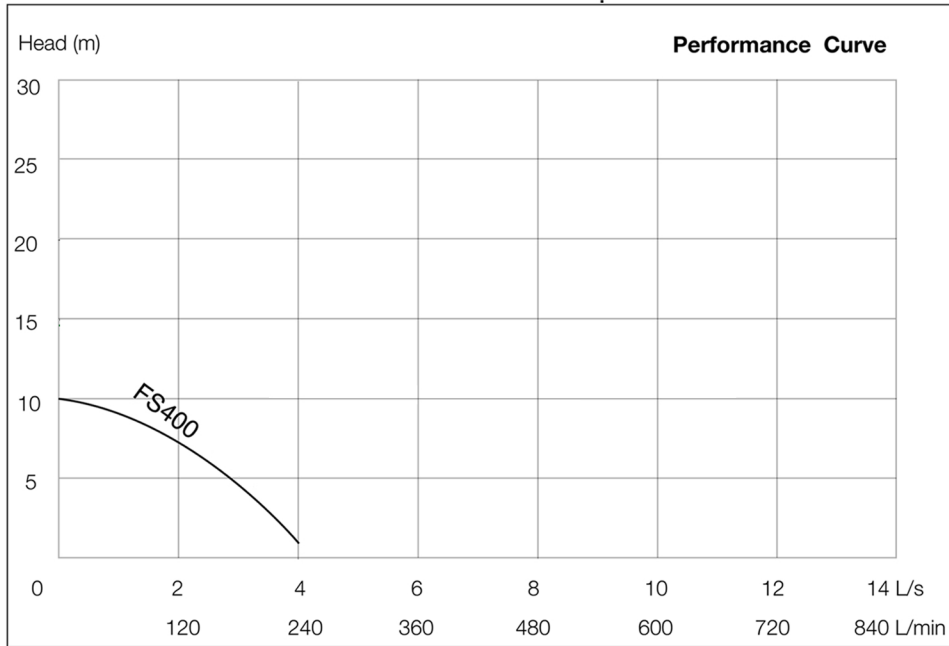

Dimensions (mm)

Model	A	B	C	D
FS 400	340	247	72	184

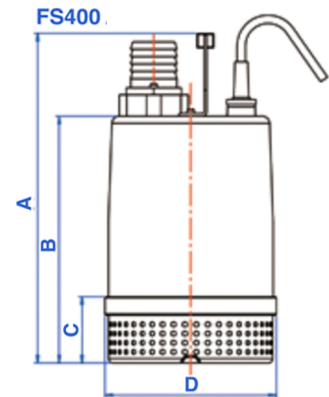

FS SERIES 0.4 Kw 240V

MODEL NO	Discharge (mm)	Max Flow (L/s)	Max Head (m)	Output (Kw)	Voltage (V)	FLC (A)	RPM	Weight (Kg)	Insulation Class
FS 400	50	4	10	0.4	240	2.5	2850	11	F
FS 400A	50	4	10	0.4	240	2.5	2850	11	F

S (single phase) A (automatic)