

DRAINAGE & WASTEWATER PUMPS

FSS SERIES 240V



Clear Industry P/L sole agent in Australia

FSS 400 SERIES

Full stainless steel pumps. Versatile and functional state of art design, made to withstand even harshest environments.

Technical specifications

Shaft	stainless steel 1.4006
Outer casing	stainless steel 1.4301
Fixtures	stainless steel 1.4301
Impeller	stainless steel 1.4301
Motorhousing	stainless steel 1.4301
Mechanical seal	double
Volute liner	Non toxic latex rubber
Motor temperature	40° C
Motor version	IP 68 class F
Voltage	1 phase 240V
Motor	IP 68, isolation, class F

- Stainless steel outer casing and strainer.
- Constructed entirely in stainless steel.
- Wear resistant heat treated stainless steel shaft.
- Double mechanical seal in oilbath.
- Max. liquid temperature: 40°C



Applications:



- Sea water transfer.
- Pumping fluids containing chemicals / chemical solutions.

2
YEAR
WARRANTY



Dimensions (mm)

Model	A	B	C	D
FSS 400	334	293	72	184

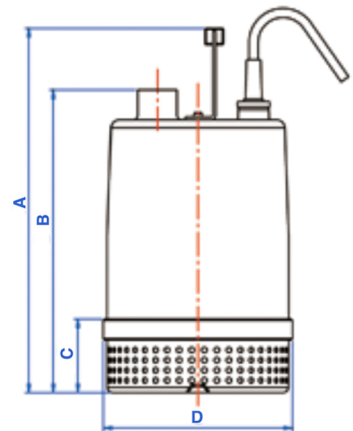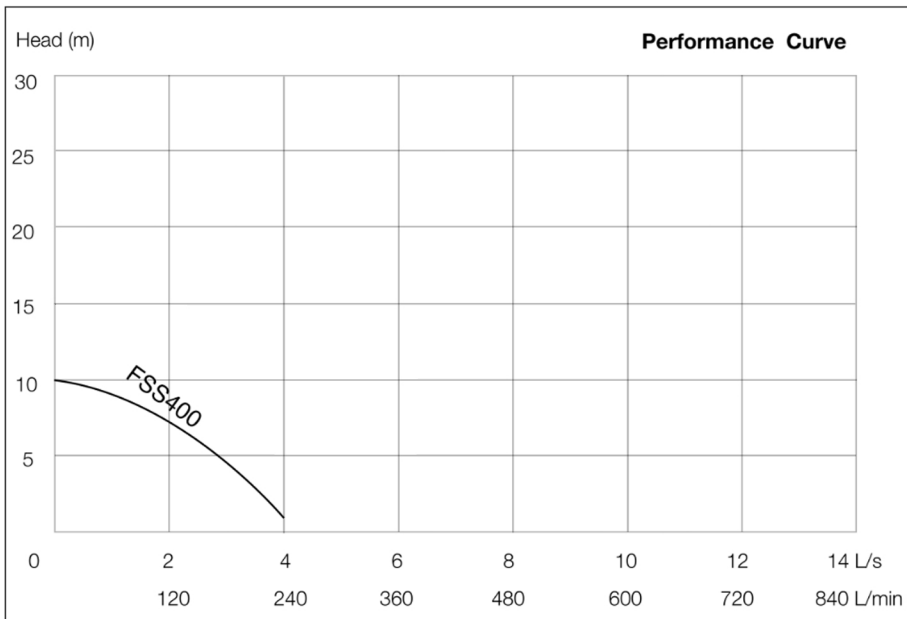

FSS SERIES 0.4 Kw 240V

MODEL NO	Discharge (mm)	Max Flow (L/s)	Max Head (m)	Output (Kw)	Voltage (V)	FLC (A)	RPM	Weight (Kg)	Insulation Class
FSS 400	50	4	10	0.4	240	2.5	2850	13	F
FSS 400A	50	4	10	0.4	240	2.5	2850	13	F

FSS (full stainless steel) A (automatic)