

DRAINAGE & WASTEWATER PUMPS

FSS SERIES 240V



Clear Industry P/L sole agent in Australia

FSS 750 SERIES

Full stainless steel pumps. Versatile and functional state of art design, made to withstand even harshest environments.

Technical specifications

Shaft	stainless steel 1.4006
Outer casing	stainless steel 1.4301
Fixtures	stainless steel 1.4301
Impeller	stainless steel 1.4301
Motorhousing	stainless steel 1.4301
Mechanical seal	double
Volute liner	Non toxic latex rubber
Motor temperature	40° C
Motor version	IP 68 class F
Voltage	1 phase 240V
Motor	IP 68, isolation, class F

- Stainless steel outer casing and strainer.
- Constructed entirely in stainless steel.
- Wear resistant heat treated stainless steel shaft.
- Double mechanical seal in oilbath.
- Max. liquid temperature: 40°C



Applications:



- Sea water transfer.
- Pumping fluids containing chemicals / chemical solutions.

2
YEAR
WARRANTY



Dimensions (mm)

Model	A	B	C	D
FSS 750	354	320	72	184

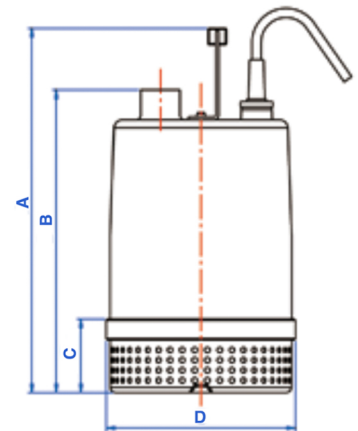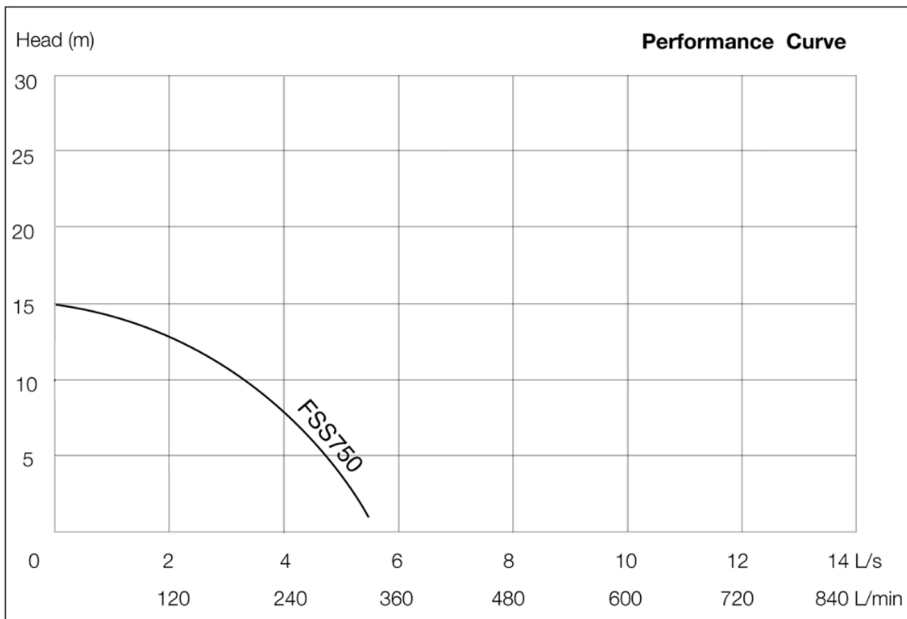

FSS SERIES 0.75Kw 240V

MODEL NO	Discharge (mm)	Max Flow (L/s)	Max Head (m)	Output (Kw)	Voltage (V)	FLC (A)	RPM	Weight (Kg)	Insulation Class
FSS 750	50	5.3	15	0.75	240	5	2850	14	F
FSS 750A	50	5.3	15	0.75	240	5	2850	14	F

FSS (full stainless steel) A (automatic)

Clear Industry P/L
1/4 Whitehead Court, Glendenning NSW 2761
T: 02 9675 6381
F: 02 9675 6382
E: clearindustry@optusnet.com.au
W: www.cleartec pumps.com.au

PICTURES ARE FOR ILLUSTRATIVE PURPOSES ONLY.
DISCLAIMER: EVERY EFFORT HAS BEEN MADE TO PUBLISH CORRECT DETAILS.
NO RESPONSIBILITY WILL BE TAKEN FOR ERRORS OR CHANGES IN PRODUCT SPECIFICATION.