

RESIDUE PUMPS FLS400 SERIES



Clear Industry P/L sole agent in Australia




FLS400



FLS400 0.4Kw 240V


Lightweight contractor pump.
A compact pump with double casing and circumferential liquid flow achieving cooling effect for continuous operations.

- Aluminium alloy outer case
- Stainless steel 410 shaft + double mech seal
- Max liquid temperature 40 °C
- Standard cable 6m

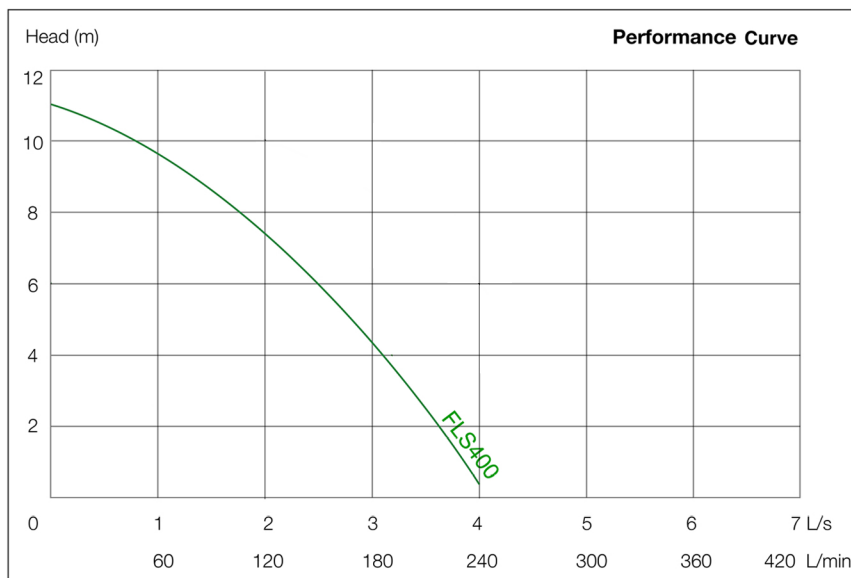

Dimensions (mm)

Model	A	B	C	D
FLS400	300	233	72	186

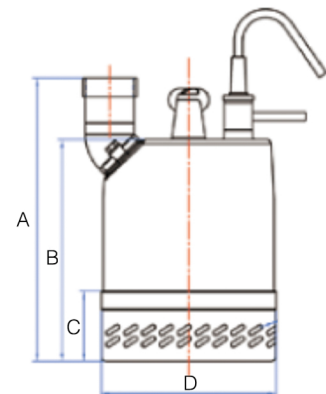

LB15 SERIES 0.15Kw 240V

MODEL NO	Discharge (mm)	Max Flow (L/s)	Max Head (m)	Output (Kw)	Voltage (V)	FLC (A)	RPM	Weight (Kg)	Insulation Class
FLS 400	50	4	11	0.4	240	2.5	2850	7.5	F