

CLASS 1 ZONE 2 PUMPS NP SERIES 240V



CLEARTEC PUMPS



2
YEAR
WARRANTY

T&Cs apply




NP750S / NP750SA



Class 1 Zone 2 approved pumps are certified under Australian and New Zealand standards for explosion protected electrical equipment. NP400S are suited for stormwater applications.

- Durable cast iron outer casing for superior heat transfer.
- In built auto reset motor protector.
- Side discharge.
- Standard 10 mts power cable.

Mechanical Seal	Double Silicon carbide upper & lower faces
Impeller	Semi-open
Motor Protection	Klixon auto reset
Pump Configuration	Free standing
Liquid Temp	≤ 40 °C
Voltage	1 Phase 240V

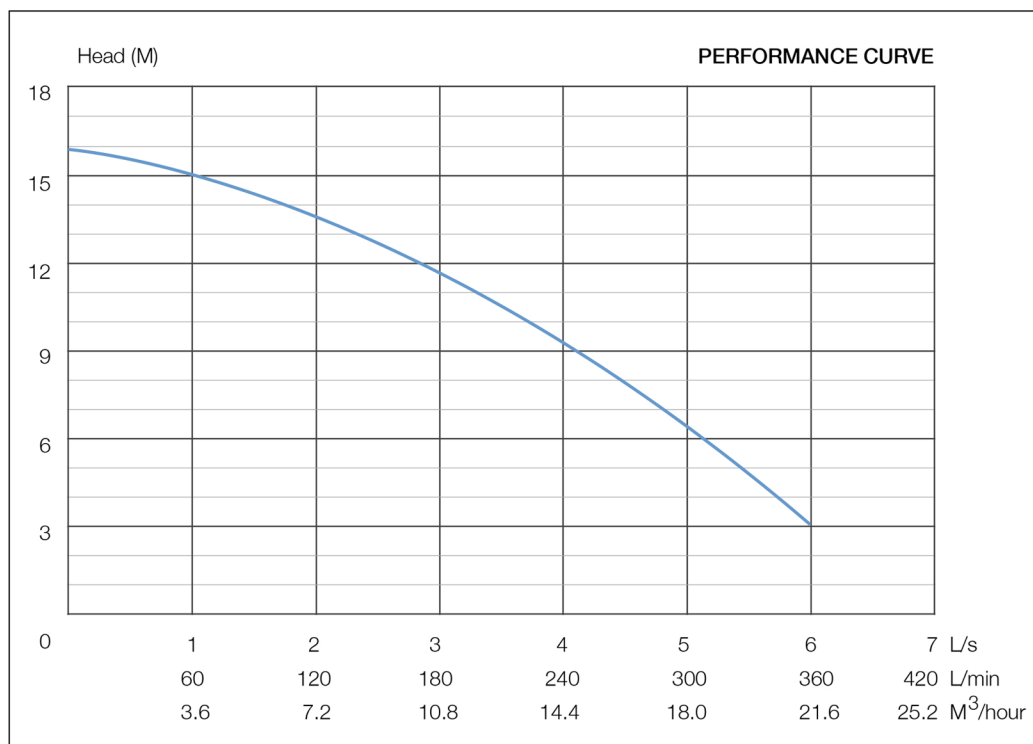

Pump Dimensions



NP SERIES SINGLE PHASE 240V

MODEL NO	Discharge (mm)	Max Flow (L/s)	Max Head (m)	Output (Kw)	Voltage (V)	FLC (A)	RPM	Solid Size (mm)	Weight (Kg)	Insulation Class
NP750S	50	6	16	0.75	240	6.4	2900	7	23	B
NP750SA	50	6	16	0.75	240	6.4	2900	7	23	B

(S) Single Phase (A) Automatic