RESIDUE PUMPS SUCLOW 240V




2 **YEAR WARRANTY** T&Cs apply

Cleartec's SUCLOW residue pumps are lightweight, portable & compact. For low water levels down to 2mm Ideal applications for removing residue water ie pods, basements and rooftops.

- Aluminium case jacketed pump
- Standard 10 mts cable

Mechanical Seal	Double Silicon carbide upper & lower faces
Impeller	Semi Open
Motor Protection	Klixon auto reset
Pump Configuration	Free standing.
Liquid Temp	≤ 40 °C
Voltage	Single Phase 240V

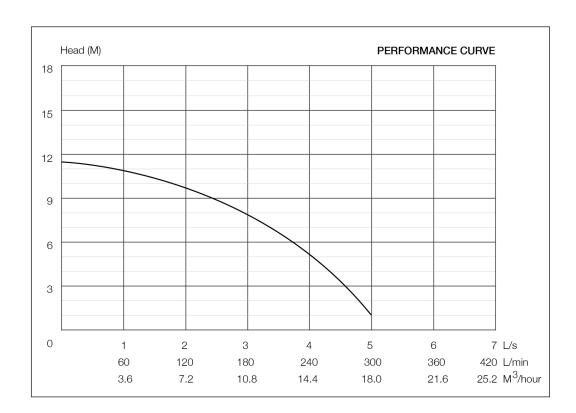

SUCLOW SERIES 0.4Kw 240V

MODEL NO	Discharge (mm)	Max Flow (L/s)	Max Head (m)	Output (Kw)	Voltage (V)	FLC (A)	RPM	Weight (Kg)	Insulation Class
SUCLOW	50	5	11.6	0.4	240	3.9	2900	11	В