

# CLASS 1 ZONE 2 PUMPS NP SERIES 415V



CLEARTEC PUMPS

**2**  
YEAR  
WARRANTY

T&Cs apply




## NP750T


Class 1 Zone 2 approved pumps are certified under Australian and New Zealand standards for explosion protected electrical equipment. NP750T are suited for stormwater applications.

- Durable cast iron outer casing for superior heat transfer.
- In built auto reset motor protector.
- Side discharge.
- Standard 10 mts power cable.

<b>Mechanical Seal</b>	Double Silicon carbide upper & lower faces
<b>Impeller</b>	Semi-open
<b>Motor Protection</b>	Klixon auto reset
<b>Pump Configuration</b>	Free standing
<b>Liquid Temp</b>	≤ 40 °C
<b>Voltage</b>	3 Phase 415V

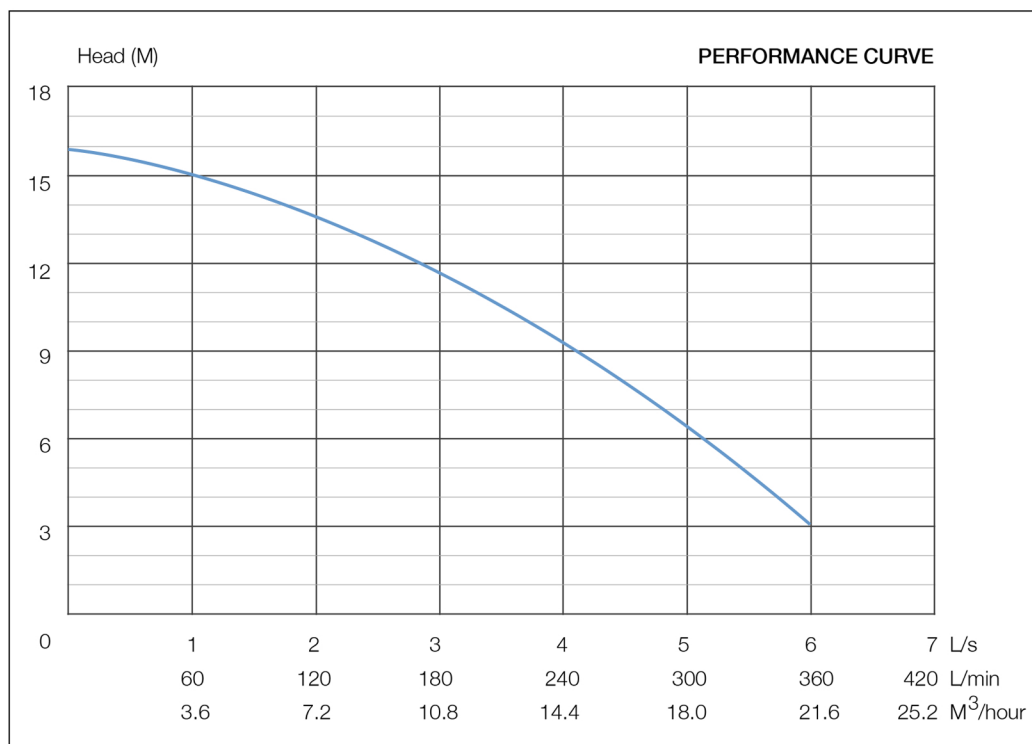

### Pump Dimensions

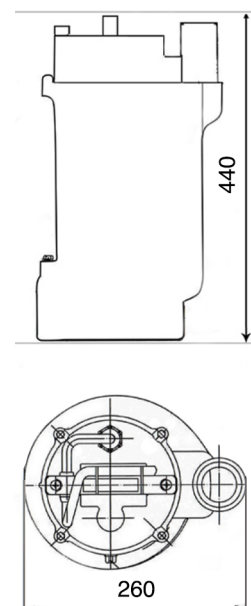

## NP SERIES THREE PHASE 415V

MODEL NO	Discharge (mm)	Max Flow (L/s)	Max Head (m)	Output (Kw)	Voltage (V)	FLC (A)	RPM	Solid Size (mm)	Weight (Kg)	Insulation Class
<b>NP750T</b>	50	6	16	0.75	415	2.6	2900	7	23	B

T (three phase)